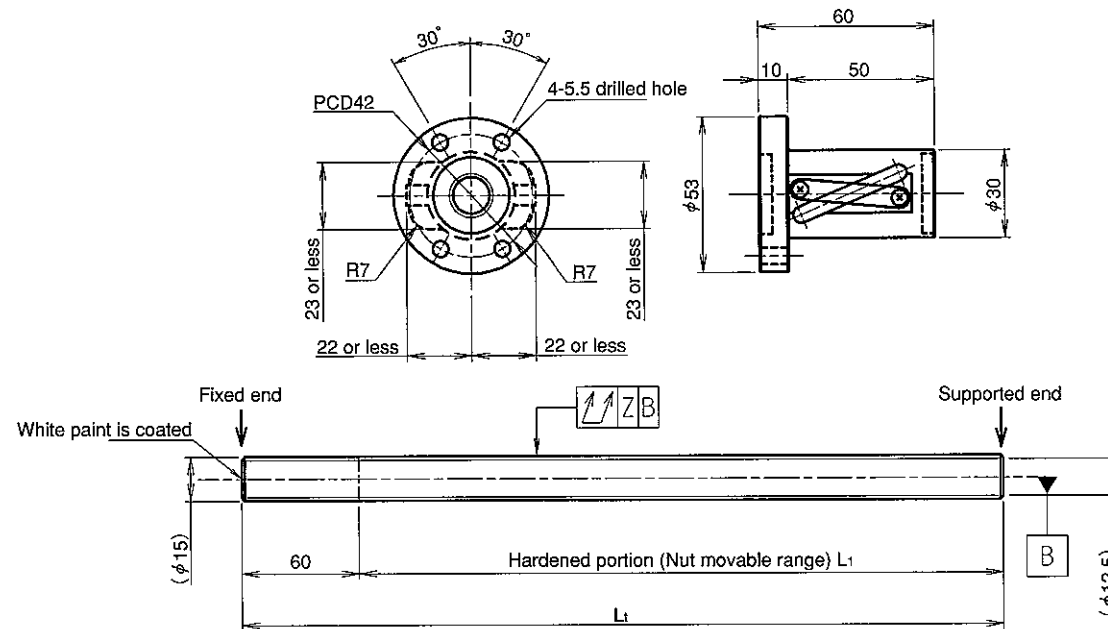


**KURODA** Standard Rolled Ball Screw : GY Series (Accuracy grade C10)

**UNFINISHED SHAFT ENDS**

 Screw shaft diameter  $\phi 15$ , Lead 20 (T nut)

(Unit : mm)


**Ball screw specifications**

Screw shaft dia.	15	Basic dynamic load rating	5800N
Lead	20	Basic static load rating	13300N
Thread direction	Right-hand	Lubricant	Alvania Grease No.2
Number of circuits	1.5turn 2circuit	Surface treatment	Phosphate coating
Ball diameter	3.175		

Model No.	Axial clearance	L <sub>1</sub>	L <sub>2</sub>	Z	Wiper
GY1520BS-CTLR-0600A	~0.100	540	600	0.140	Lip seal
GY1520BS-CTLR-1200A		1140	1200	0.400	

**Table of optional specifications for each model**

Additional machining of shaft end	Surface treatment (Note 1)	Difference of grease	Direction of nut	Wiper removal
○	○	○	○	○

(Note 1) The above-mentioned surface treatment is LD treatment (coating thickness : 1 to 2  $\mu$ m).

**Notation of standard rolled ball screw**

● Standard length shaft without end machining (Matched screw shaft and nut)

GY1520BS-CTLR-□□□□A

● Nut only without screw shaft

GY1520BS-CTLR

● Screw shaft only without end machining

GY1520ZZ-ZZZZ-□□□□D

● With end machining specified on your drawing (Matched screw shaft and nut)

GY1520BS-CTLR-□□□□X□□□□-CAY

● With end machining specified on your drawing (Screw shaft only)

GY1520ZZ-ZZZZ-□□□□Y□□□□-CAY

Overall length    Thread length